

FIXED CHANNEL CONICAL ROUNDER *CONIBALL F1 and F2*



USE

- Machine for rounding both soft and medium doughs.
- Weight from 100 gr up to 1000 gr: CONIBALL F1 (from 8.81 oz to 35.27 oz)
- Weight from 200 gr up to 3000 gr : CONIBALL F2 (from 17.63 oz to 105.82 oz)

Production rate (*): 2000 pieces per hour

Dough ball rounding.

The rolling effect is achieved thanks to a cone that, while rotating, rolls the dough along a concave spiral-shaped way and enables production of spheric dough balls.

Teflonized channels

Allows to facilitate the slipping of the dough while guaranteeing a great ease of work.

Automatical flour device.

Prevents dough balls from doubling in the rounder.

FEATURES

- Steel frame.
- Anti-corrosive aluminum cone
- Fixed teflon-coated channels.
- Belt drive.
- Mechanic brush-type flour device with adjustable flow rate.
- Hot or cold air ventilation (on option).
- Machine mounted on castors equipped with a locking system.
- Channels length :
 - CONIBALL F1 : 3.83 m (12.56 f)
 - CONIBALL F2 : 3.61 m (11.84 f)

OPTIONS

- ***Cone bell in aluminium, teflon-coated :***
Dough sliding is easier.
Guarantees a higher easiness for working.
- ***Air ventilation system for wet dough :***
 - Cold or hot air.
 - By simply and slightly drying the dough surface you can easily process the wettest doughs.

PRESENTATION



- 1— Flour device
2— Cone bell made of aluminium,
(teflon in option)
3— Discharge hopper

WEIGHT AND PACKAGING DIMENSIONS

Net weight :

- CONIBALL F1 : 360 kg (793 lb)
- CONIBALL F2 : 310 kg (683 lb)

Packaging on slatted outer carton pallet two way :

Gross weight : ? kg
Dimensions (Length X Width X Height) : ?m X ?m X ?m

Packaging on slatted wood box pallet two way () :*

Gross weight : ? Kg
Dimensions (Length X Width X Height) : ?m X ?m X ?m



(*) Maritime full box, non-treated wood

SECURITY - HYGIENE

The conical rounder is in accordance with :

- 89/392 EEC, the directives on hatches .
- the labour regulations.

OVERALL DIMENSIONS

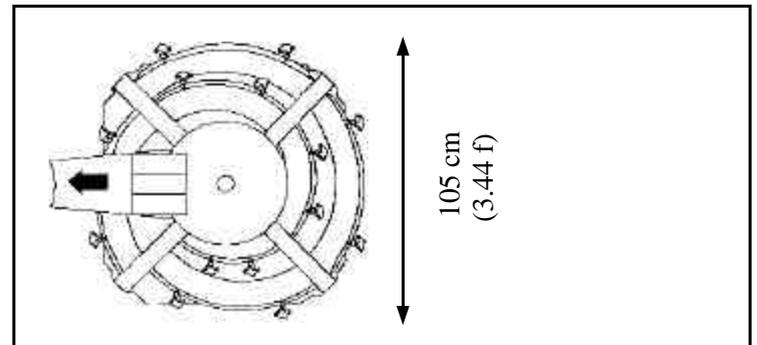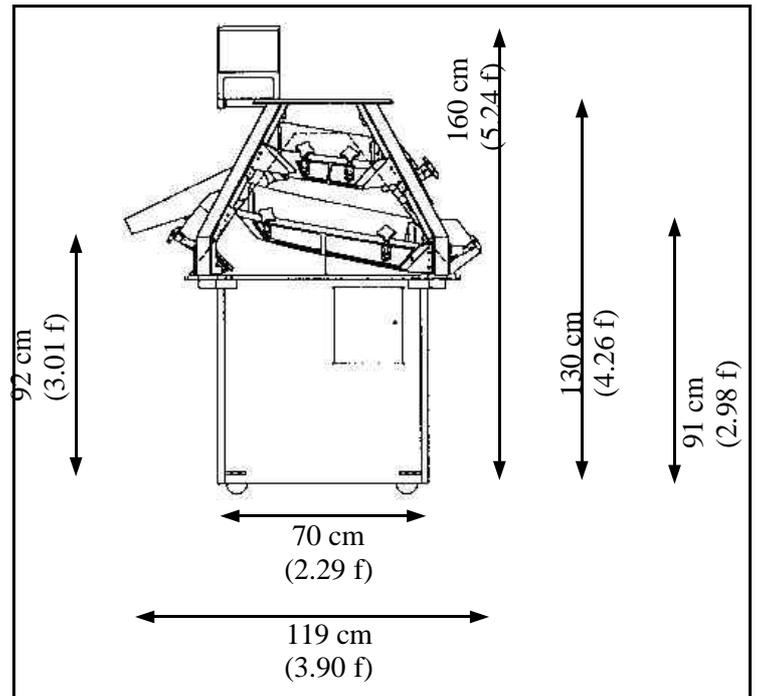

ELECTRIC SPECIFICATIONS

- 220v – 50Hz - 0.75 KW - 3.87A
- 220v – 60Hz - 0.9 KW - 3.87A
- 400v - 50Hz - 0.75 KW - 2.23A
- 400v – 60Hz - 0.9 KW - 2.23A



MERAND

Dough processing expert

Distributed by :