




Elettrodrago Avant 4 chambers, 3 doors

CHARACTERISTICS

CONTROLS FOR EACH CHAMBER	
Digital keyboard with two baking phases	✓
100-Program Digital keyboard with four baking phases	○
Electronics control separate from the power control	✓
Controlled heating function	✓
Energy level	✓
Stand by energy function	✓
Programmable auto start per chamber	✓
Separate controls for chambers and mouth to compensate mouth dispersion	✓
Autolevel system	✓
Energy distributor top / bottom	✓
Timer with buzzer for end of baking	✓
Programmable automatic chamber shutdown	✓
Automatic valve opening / closing cycle for steam discharge	○
OVEN CONTROL	
Bakery management computer	○
Economizing computer	○
"Super Power" control	○
CONSTRUCTION COMPONENTS	
Baking surfaces in reinforced concrete	✓
Variable steam vacuum positioning	✓
Removable grid for hood	✓
Double lights for chamber (1xL = 33,1" / 84 cm)	✓
Electrical panel with front access	✓
Doors mouth, low-emitting glass	✓
Diecast manifold for water inlet solenoid valves	✓
Precompressed insulation panels	✓
Insulation between chambers	✓
Control board protecting box	✓
HEAT SYSTEM	
Mass ceramic heating elements	✓
STEAM SYSTEM	
Steamer fittings in anti-corrosion material	✓
Independent steamer for each room with timed solenoid valve	✓
Automatic steam extractor valve	○
Hood with steam suction	✓
Steam condenser	○
Hood filters and cleaning and steam exhaust vents	○
OTHERS	
Symmetric oven	○
Steam controls to the opposite side	○
Integrated oven loader	○

✓ STANDARD ○ OPTIONAL

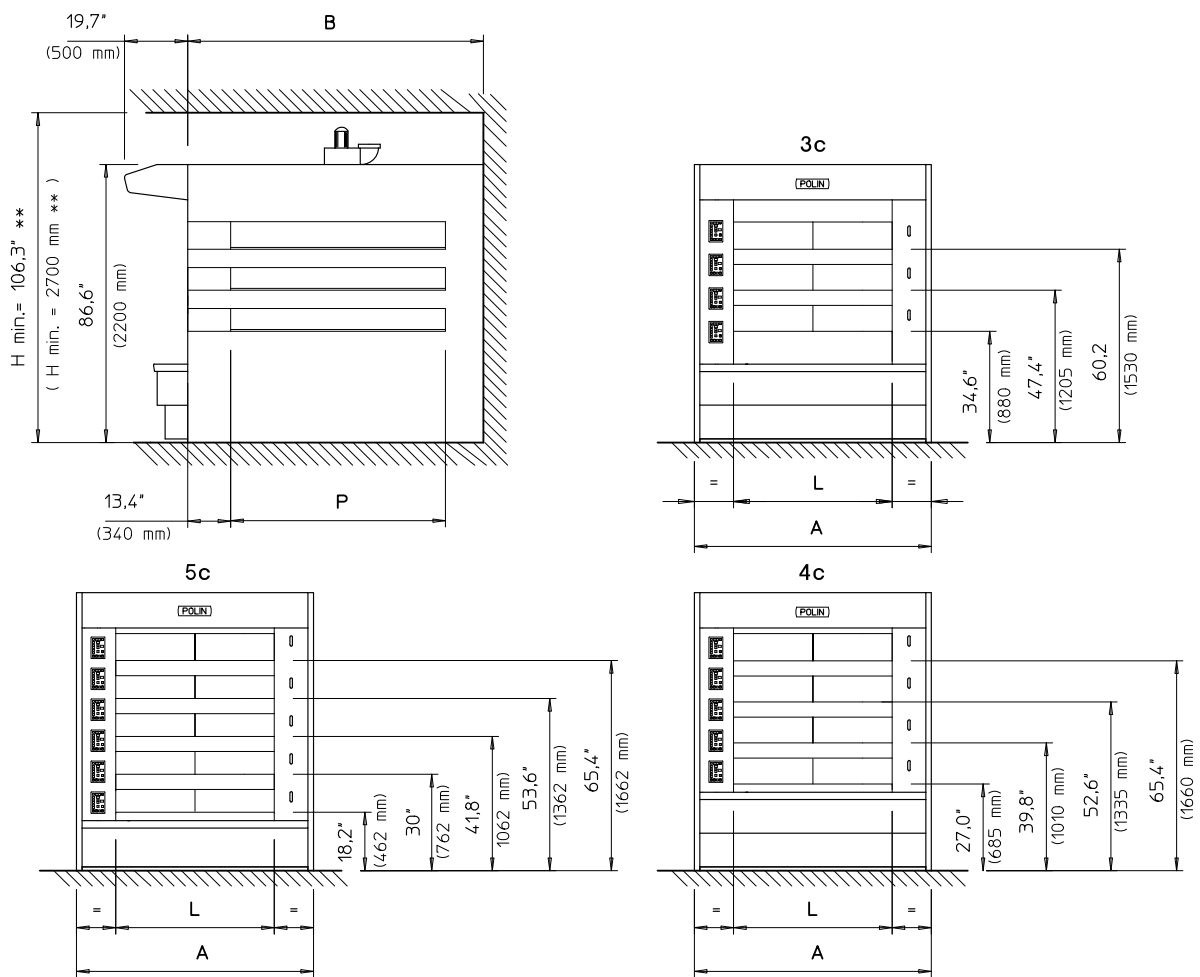

** 110" (2800 mm) with a 2 speed motor

	Chambers	Baking sup. in ² (sq)	Overall dimensions		Working dimensions of the chambers		Electrical power with steamer		
					Width L	Depth P	Maximum	Economizing computer	Bakery management computer
			n°	in (mm)	in (mm)	in (mm)	in (mm)	kW	kW
3,2/84x126-3	3	4.960 (3,2)	58,1 (1475)	74,8 (1900)	33,1 (840)	49,6 (1260)	22,5	17	8,5
4,2/84x126-4	4	6.510 (4,2)		74,8 (1900)		49,6 (1260)	30	22	12
5,3/84x126-5	5	8.215 (5,3)		74,8 (1900)		49,6 (1260)	37	30,5	20
4,3 / 84x170-3	3	6.665 (4,3)		92,1 (2340)		66,9 (1700)	27,5	21	11
5,7 / 84x170-4	4	8.835 (5,7)		92,1 (2340)		66,9 (1700)	36,5	27,5	15
7,1 / 84x170-5	5	11.005 (7,1)		92,1 (2340)		66,9 (1700)	45,5	37	23,5
5,4 / 84x214-3	3	8.370 (5,4)		109,4 (2780)		84,3 (2140)	33	25,5	13
7,2 / 84x214-4	4	11.160 (7,2)		109,4 (2780)		84,3 (2140)	43,5	33	17
9,0 / 84x214-5	5	13.950 (9)		109,4 (2780)		84,3 (2140)	54,5	44	28
6,5 / 84x258-3	3	10.075 (6,5)		126,8 (3220)		101,6 (2580)	38	30,5	15
8,7 / 84x258-4	4	13.485 (8,7)		126,8 (3220)		101,6 (2580)	50,5	38	20
10,8 / 84x258-5	5	16.740 (10,8)		126,8 (3220)		101,6 (2580)	63	51	32,5
4,7 / 124x126-3	3	7.285 (4,7)	73,8 (1875)	74,8 (1900)	48,8 (1240)	49,6 (1260)	26	20	11
6,2 / 124x126-4	4	9.610 (6,2)		74,8 (1900)		49,6 (1260)	34,4	26	15
7,8 / 124x126-5	5	12.090 (7,8)		74,8 (1900)		49,6 (1260)	42,8	34,5	24
6,3 / 124x170-3	3	9.765 (6,3)		92,1 (2340)		66,9 (1700)	31,5	24	14
8,4 / 124x170-4	4	13.020 (8,4)		92,1 (2340)		66,9 (1700)	42	31,5	18
10,5 / 124x170-5	5	16.275 (10,5)		92,1 (2340)		66,9 (1700)	52	42	27
8,0 / 124x214-3	3	12.400 (8)		109,4 (2780)		84,3 (2140)	38	30,5	18
10,6 / 124x214-4	4	16.430 (10,6)		109,4 (2780)		84,3 (2140)	50,5	38	23
13,3 / 124x214-5	5	20.615 (13,3)		109,4 (2780)		84,3 (2140)	63	51	32
9,6 / 124x258-3	3	14.880 (9,6)		126,8 (3220)		101,6 (2580)	44,5	36,5	21
12,8 / 124x258-4	4	19.530 (12,6)		126,8 (3220)		101,6 (2580)	58,5	44	28
16,0 / 124x258-5	5	24.800 (16)		126,8 (3220)		101,6 (2580)	73,5	59	37,5

CHARACTERISTICS

	Chambers	Baking sup.	Overall dimensions		Working dimensions of the chambers		Electrical power with steamer		
					Width L	Depth P	Maximum	Economizing computer	Bakery management computer
	n°	in ² (mq)	Width A in (mm)	Depth B in (mm)	in (mm)	in (mm)	kW	kW	kW
8,0 / 156x170-3	3	12.400 (8)	86,4 (2195)	92,1(2340)	61,4 (1560)	66,9 (1700)	36,5	29	18
10,6 / 156x170-4	4	16.430 (10,6)		92,1 (2340)		66,9 (1700)	48,5	36,5	22
13,3 / 156x170-5	5	20.615 (13,3)		92,1 (2340)		66,9 (1700)	60,5	49	31
10,0 / 156x214-3	3	15.500 (10)		109,4 (2780)		84,3 (2140)	44,5	36,5	21
13,5 / 156x214-4	4	20.925 (13,5)		109,4 (2780)		84,3 (2140)	58,5	44	28
16,7 / 156x214-5	5	25.885 (16,7)		109,4 (2780)		84,3 (2140)	73	59	37,5
12,0 / 156x258-3	3	18.600 (12)		126,8 (3220)		101,6 (2580)	52	44	25
16,0 / 156x258-4	4	24.800 (16)		126,8 (3220)		101,6 (2580)	69	52	33
20,1 / 156x258-5	5	31.155 (20,1)		126,8 (3220)		101,6 (2580)	86	69,5	44
9,4 / 186x170-3	3	14.570 (9,4)		98,4 (2500)		92,1 (2340)	73,2 (1860)	66,9 (1700)	38,5
12,5 / 186x170-4	4	19.375 (12,5)	92,1 (2340)		66,9 (1700)	50,5		38	25
15,8 / 186x170-5	5	24.490 (15,8)	92,1 (2340)		66,9 (1700)	63		51	32,5
12,0 / 186x214-3	3	18.600 (12)	109,4 (2780)		84,3 (2140)	46,5		38,5	24
16,0 / 186x214-4	4	24.800 (16)	109,4 (2780)		84,3 (2140)	61,5		46,5	33
19,9 / 186x214-5	5	30.845 (19,9)	109,4 (2780)		84,3 (2140)	77		62	39
14,0 / 186x258-3	3	21.700 (14)	126,8 (3220)		101,6 (2580)	54,5		47	29
19,0 / 186x258-4	4	29.450 (19)	126,8 (3220)		101,6 (2580)	72,5		54,5	39
24,0 / 186x258-5	5	37.200 (24)	126,8 (3220)		101,6 (2580)	90		73	46
11,9/234x170-3	3	18.445 (11,9)	117,3 (2980)		92,1 (2340)	92,1 (2340)		66,9 (1700)	45,5
15,9/234x170-4	4	24.645 (15,9)		92,1 (2340)	66,9 (1700)		60,5	45,5	32
19,9/234x170-5	5	30.845 (19,9)		92,1 (2340)	66,9 (1700)		75,5	59,5	40
15,0/234x214-3	3	23.250 (15)		109,4 (2780)	84,3 (2140)		55,5	48	28
20,0/234x214-4	4	31.000 (20)		109,4 (2780)	84,3 (2140)		74	55,5	39
25,1/234x214-5	5	38.905 (25,1)		109,4 (2780)	84,3 (2140)		92	74	48
18,1/234x258-3	3	28.055 (18,1)		126,8 (3220)	101,6 (2580)		65,5	58	33
24,1/234x258-4	4	37.355 (24,1)		126,8 (3220)	101,6 (2580)		87,5	65,5	45
30,2/234x258-5	5	46.810 (30,2)		126,8 (3220)	101,6 (2580)		109	87	56
12,6/248x170-3	3	19.530 (12,6)		123,0 (3125)	92,1 (2340)		97,6 (2480)	66,9 (1700)	46,6
16,8/248x170-4	4	26.040 (16,8)	92,1 (2340)		66,9 (1700)	61,8		46,5	32
21,0/248x170-5	5	32.550 (21)	92,1 (2340)		66,9 (1700)	77		61,5	41
16,0/248x214-3	3	24.800 (16)	109,4 (2780)		84,3 (2140)	56,9		49,5	29
21,2/248x214-4	4	32.860 (21,2)	109,4 (2780)		84,3 (2140)	75,6		57	39
26,5/248x214-5	5	41.075 (26,5)	109,4 (2780)		84,3 (2140)	94,3		75,5	49
19,2/248x258-3	3	29.760 (19,2)	126,8 (3220)		101,6 (2580)	67,3		59,5	34
25,6/248x258-4	4	39.680 (25,6)	126,8 (3220)		101,6 (2580)	89,4		67	46
32,0/248x258-5	5	49.600 (32)	126,8 (3220)		101,6 (2580)	111,5		89,5	57